

COMST COMMERCIAL STRIP FIXTURE



FEATURES

- Solid state, high shock & vibration resistant
- Instant-start, no flickering, no humming
- No mercury; No recycling costs



4', 20 & 40 watt specification-grade, LED linear strip luminaire. For use with indoor applications where low-cost, but industrial-grade ruggedness is required.

TECHNICAL SPECIFICATIONS

Housing	Extruded aluminum and high impact resistant PMMA end caps
Finish	White end caps, aluminum body
Mounting	Surface, air craft, or chain mounted
Applications	Storage areas, manufacturing, parking garages, stairwells, utility areas, valances, warehouse areas

ELECTRICAL SPECIFICATIONS

Lighting Source	LED Linear Engines
Available Wattages	20w, 40w
Power Factor	>0.96
Ambient temperature	-20° to 40°C
Available Voltages	110-277vAC standard, 347v

OPTICAL & PERFORMANCE SPECIFICATIONS

Lumen Output	20w: 2,050L 40w: 4,100L
CRI	80
Beam Angle	150°
L70	50,000 hours
LM80	55°C 2,000 hours 112%
LM79	110 lumens per watt
Certifications	Approved to CSA and UL standards (UL, or equivalent, marked only when specified)



info@ecopowerinc.com | ecoled.ecopowerinc.com | 1.800.564.8086




A Canadian
Manufacturer

Warranty is only valid based on fixtures operating for 12 hours or less per day.

©2019 Ecopower Inc. All rights reserved.
REV-0724.19-145144

DIMENSIONS

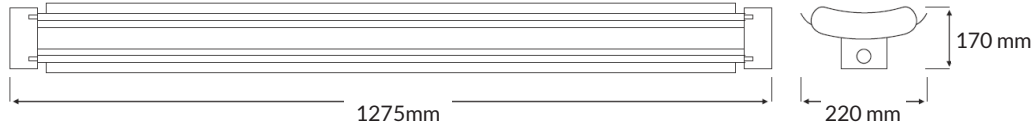

PRODUCT CODE GENERATOR Some combinations of adders may not be possible, email quotes@ecopowerled.com for further info.

COMST					-			-	
	↓	↓	↓	↓		↓	↓		↓
	Size (')	# of Lamps	Wattage	Lens		Kelvin	Voltage		Options
	4	1 2	20w 40w	L1 (clear) L2 (frosted)		WW (3000k) NW (4000k) CW (5000k)	V4 (120v/277vAC) V5 (347v)		Mounting Options M10(xx) Chain Set (5' and 'S' hooks) M36 Aircraft Cable 'Y' (120" std)
									Wiring Options V05 Cord and 120v Plug (Standard 10' x 3-14 Ga.) V08 Flexible Cord Feed (Single Circuit Only)