

CP1 LED CANOPY & WALL LUMINAIRE



FEATURES

- 80+ lumens a watt
- Highly durable
- Vandal resistant
- Polycarbonate lens
- Quick install
- Solid state, high shock & vibration resistant
- Instant-start, no flickering, no humming
- No mercury; No recycling costs
- Equally distributed light emissions
- Surface Mount

OPTIONS

- 347v
- 0-10vDC dimming
- Occupancy sensor (runs at 50% brightness, when detecting movement goes up to 100% and then back down to 50% again)

100% Die cast aluminum, IP65 enclosure and pc diffuser, this luminaire is specifically designed for Canada's harshest climates. Built in rear j-box plate provides a quick install.

TECHNICAL SPECIFICATIONS

Housing	Die-cast aluminum
Finish	Dark Bronze
Mounting	Wall, ceiling, front recessed screws, rear junction box
Applications	Under canopy (gas), wall and security area lighting, platforms, stairways, institutions

ELECTRICAL SPECIFICATIONS

Lighting Source	Osram or Nichia
Voltage	Max 36vDC, 1400ma
Available Wattages	45w, 70w
Power Factor	>0.99
Ambient temperature	-40° to 40°C
Available Voltages	110-277vAC std, 347vAC option

OPTICAL & PERFORMANCE SPECIFICATIONS

Lumen Output	45w: 3,800L 70w: 5,800L
CRI	>75
Beam Angle	150°
LM80	>98% @ 1000 Hours
LM79	80 ± 5%
Certifications	UL, CuLu, CE, RoHS



info@ecopowerinc.com | ecoled.ecopowerinc.com | 1.800.564.8086




©2019 Ecopower Inc. All rights reserved.
REV-0829.19-131736

Warranty is only valid based on fixtures operating for 12 hours or less per day.

CP1 LED CANOPY & WALL LUMINAIRE

ecoLEDTM
A DIVISION OF **ecopower**

DIMENSIONS

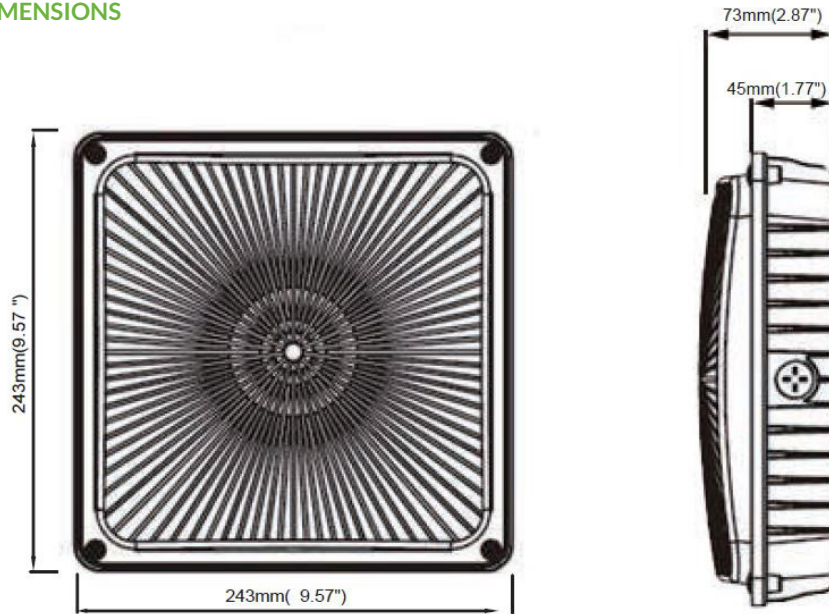

PRODUCTS AVAILABLE

- CP1-45WNWV4
- CP1-70WCWV4
- CP1-70WNWV4
- CP1-80WCWV4

info@ecopowerinc.com | ecoled.ecopowerinc.com | 1.800.564.8086



©2019 Ecopower Inc. All rights reserved.
REV-0829.19-131736