

GAS CANOPY LED

ecoLED™

A DIVISION OF ecopower



Surface Mount



Recessed Model

FEATURES

- Reduce maintenance costs over traditional light sources
- Minor output loss over life of fixture
- 10+ life rating at 4300 hours a year
- Recessed or surface mount options, ease of installation

OPTIONS

- Hi/Lo/Off Occupancy Sensor

Premium enclosed, recessed or flush mount gas canopy light to replace traditional HID and HPS lighting. This product uses Phillips LumiLED as its light source, and Meanwell as its power supply. A wide range of wattages provide greater flexibility in lighting design under the canopy

TECHNICAL SPECIFICATIONS

Housing	Aluminum and tempered glass
Finish	White
Lens	Tempered clear glass
Mounting	Surface or flush
Applications	Flush or recessed gas canopy, entrance and lobby environments

ELECTRICAL SPECIFICATIONS

Lighting Source	Philips LumiLED
Available Wattages	80w, 120w, 160w
Power Factor	>0.95
Ambient temperature	-40° to 55°C
Available Voltages	85-265vAC standard

OPTICAL & PERFORMANCE SPECIFICATIONS

Lumen Output	80w: 7,440L 120w: 11,160L 160w: 14,880L
IP Rating	IP65
CRI	>80
Beam Angle	90°
L70	>50,000 hours
LM79	93 lumens per watt ±5%
Downflux Efficiency	98.4%
Certifications	Approved to CSA and UL standards (UL, or equivalent, marked only when specified)



info@ecopowerinc.com | ecoled.ecopowerinc.com | 1.800.564.8086





A Canadian
Manufacturer

Warranty is only valid based on fixtures operating for 12 hours or less per day.

©2019 Ecopower Inc. All rights reserved.
REV-0724.19-144611

DIMENSIONS & PHOTOMETRICS

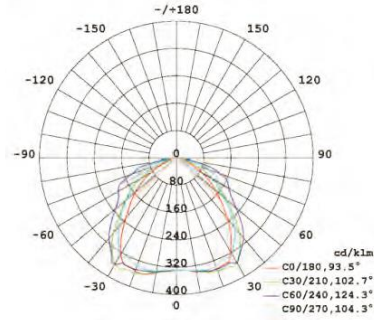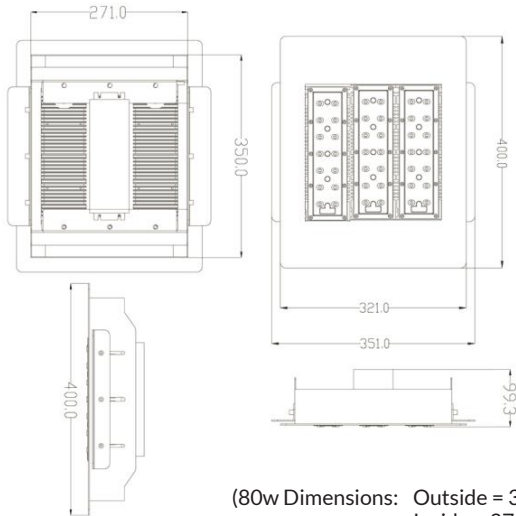

(80w Dimensions: Outside = 300.0375mm x 300.0375mm
Inside = 273.05mm x 273.05mm)

Figure 3 120 watt model

AVAILABLE PRODUCTS

- GC80WNWV4
- GC80WNWV4-M40

