

OVL OVERDOOR LED WALL PACK



OPTIONS

- Custom body colours

Aesthetic curved design. Frosted UV stabilized poly carbonate diffuser. Aluminum backplate. Chip & fade resistant polymerized finish available in any colour. Integrated industrial quality photocell.

TECHNICAL SPECIFICATIONS

Housing	UV stabilized PC with aluminum back plate
Finish	Bronze standard
Mounting	Flush mount; easy install
Applications	Walkways, parking lots, alleyways, entrance ways, tunnels and security lighting

ELECTRICAL SPECIFICATIONS

Lighting Source	CITIZEN COB
Power Factor	>0.9
Ambient temperature	-30° to 40°C
Available Voltages	120-277V

OPTICAL & PERFORMANCE SPECIFICATIONS

Lumen Output	10w: 1,167.7~1,267.57L 15w: 1,651.7L~1,812.05L 20w: 2,029.7L~2,134.5L 30w: 3,296L~3,463L
IP Rating	IP65
CRI	80
LM80	L70 = 50,000 hours +
LM79	98L/W ~ 119L/W
Certifications	Approved to cUL standards



info@ecopowerinc.com | ecoled.ecopowerinc.com | 1.800.564.8086



A Canadian
Manufacturer

Warranty is only valid based on fixtures operating for 12 hours or less per day.


©2019 Ecopower Inc. All rights reserved.
REV-0724.19-144514

OVL OVERDOOR LED WALL PACK




DIMENSIONS

OVL 500 10W / 15W / 20W — 8.25" x 6.36" x 3.04"

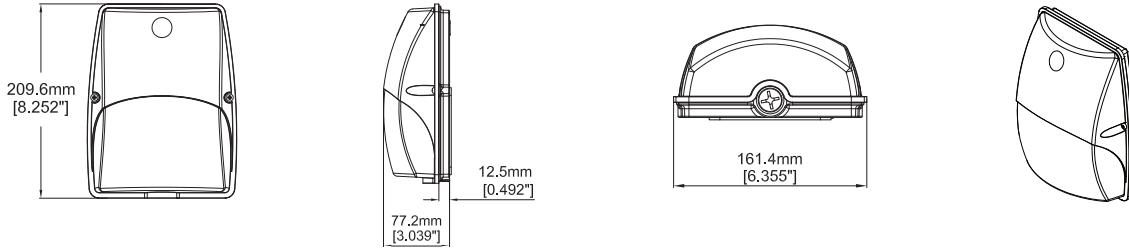

OVL 520 30W — 11.76" x 9.05" x 4.27"



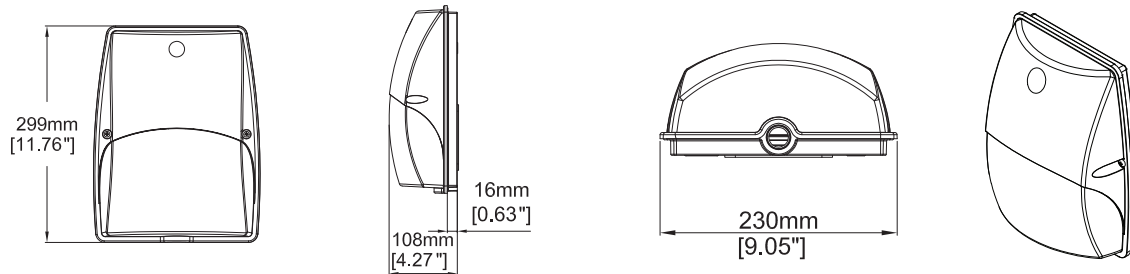


PHOTOMETRY



Each unit within the graph represents the mounting height in Feet. Multiply the unit to get the proper mounting height distance. For example, if mounting height is 12 feet, unit 1 equals 12 feet, unit 2 equals 24 feet. The colour units within the photometric chart represent the following foot candle values:

.25 .50 1.0 2.0 5.0

OVL 500 10W / 15W / 20W

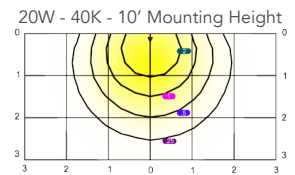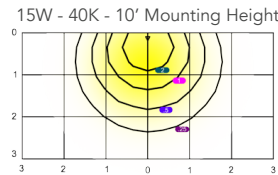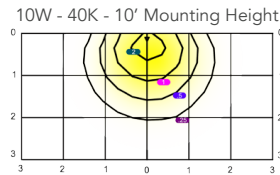

OVL 520 30W

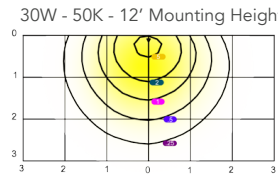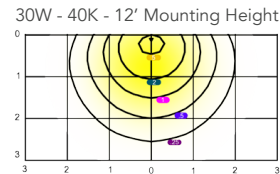

PRODUCT CODE GENERATOR

Some combinations of adders may not be possible, email quotes@ecopowerled.com for further info.

OVL					-	
	Size	Wattage	Kelvin	Voltage		Options
	500 520	10w 15w 20w 30w	NW (4000K) CW (5000K)	V4 (120-277vAC)		B03 with photocell 120-277V & 0-10V Dimmable Blank with photocell 120-277V, Non-dimmable

info@ecopowerinc.com | ecoled.ecopowerinc.com | 1.800.564.8086



A Canadian Manufacturer