

SDL SERIES LED SLIM DOWNLIGHT

ecOLED™
A DIVISION OF **ecPOWER**



FEATURES

- Dimmable (standard voltage only)
- cETL & ETL listed, meets all CSA requirements
- Type IC Rated – Approved for Direct Contact with Insulation
- Pot Light Housing is NOT Required even for Insulated Ceilings
- Suitable for damp locations

OPTIONS

- Warm white 3000K, Neutral White 4100K, Cool White 5000K

4" and 6" round fixtures built with integral LEDs and an integral driver. Allows for quick install and easy junction box mounting. Mount fixture by cutting a hole in ceiling and snapping fixture in place by holding back integral clips and placing fixture in hole. 2" clearance in ceiling required for driver to fit thru hole.

ELECTRICAL SPECIFICATIONS

Default Driver	120V AC 60 Hz (Dimmable)
Input Voltage	
Power Factor	>0.95 (standard voltage)
Energy Used	4" 9w 6" 12w & 15w
Halogen Equivalent	50w 65w 85w 100w
Ambient temperature	-40° to 40°C

OPTICAL & PERFORMANCE SPECIFICATIONS

Lumen Output	4" 9W - Warm White 650L Neutral White 700L
	6" 12W Warm: 800L Neutral: 880L 15W Warm: 1000L Neutral: 1100L
CRI	2700K: 84 4100K: 82
Beam Angles	120°
Compliance	cETL & ETL listed, meets all CSA requirements
Rated	Type IC (Direct contact with insulation), Air-Tight



info@ecopowerled.com | ecopowerled.com | 1.800.564.8086



A Canadian
Manufacturer



Warranty is only valid based on fixtures operating for 12 hours or less per day.

©2019 Ecopower Inc. All rights reserved.
REV-0211.19-150806

SDL SERIES LED SLIM DOWNLIGHT



DIMENSIONS

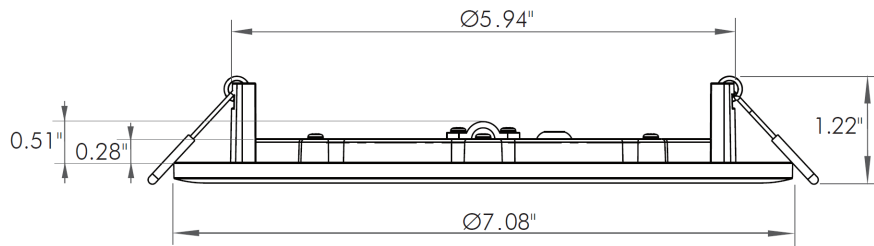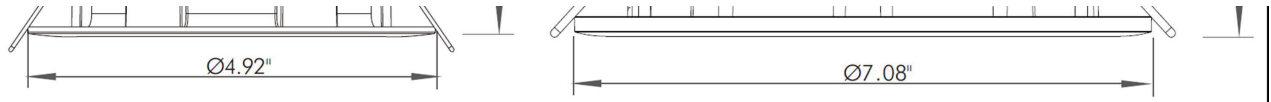

PRODUCT CODE GENERATOR Some combinations of adders may not be possible, email quotes@ecopowerled.com for further info.

