

# T8U LED U-BULB




A DIVISION OF ecPOWER

### FEATURES

- 1" x 24" size
- Dimming range 10-95%

### OPTIONS

- Internal/external driver
- Dimmable or non-dimmable
- Frosted/clear lens

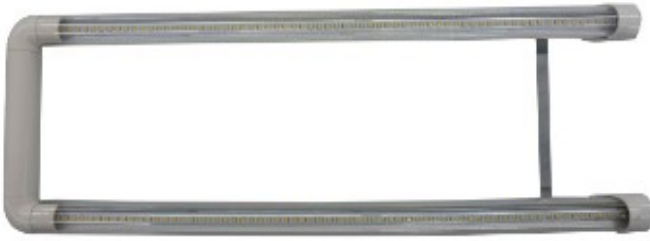

Cost effective 2' x 2' troffer retrofit, available with a dimming option.

### TECHNICAL SPECIFICATIONS

|              |  |
|--------------|--|
| Housing      | 6063 Aluminum profile                        |
| Lens         | Clear, frosted (6% lumen output loss)        |
| Mounting     | G13 Standard, single-end output              |
| Applications | Retrofit for 2x2 U type fluorescent troffers |

### ELECTRICAL SPECIFICATIONS

|                     |  |
|---------------------|--|
| LED Engine          | Epistar Led SMD 2835 130 Pieces            |
| Available Wattages  | 15w  |
| Power Source        | Internal or external                       |
| Power Factor        | >0.9                                       |
| Ambient temperature | -10° to 30°C                               |
| Available Voltages  | Non-Dimmable AC100-277V /<br>Dimmable 120V |

### OPTICAL & PERFORMANCE SPECIFICATIONS

|                     |                                    |
|---------------------|------------------------------------|
| Luminous Flux       | 1,500 - 1,650 LM                   |
| CRI                 | >80                                |
| Beam Angle          | 120°                               |
| L70                 | >50,000 hours                      |
| Downflux Efficiency | 98% with clear lens                |
| Certifications      | Meets cULu standards, UL, CE, RoHS |



### AVAILABLE MODELS

T8U-18WNWV3L2

T8U-15WCWV4L1



info@ecopowerinc.com | ecoled.ecopowerinc.com | 1.800.564.8086



A Canadian  
Manufacturer

Warranty is only valid based on fixtures operating for 12 hours or less per day.

©2019 Ecopower Inc. All rights reserved.  
REV-0724.19-144413