

# VTSL VAPOUR TIGHT SLIM LINE

**ecOLED**<sup>™</sup>  
A DIVISION OF ecPOWER



## FEATURES

- Suitable for indoor or outdoor applications
- Dust and water resistant
- High efficiency standard clear lens or opal lens reduces glare
- Poured in place continuous gasket will resist temporary immersion in water
- Solid state, high shock & vibration resistant
- Instant-start, no flickering, no humming
- No mercury; No recycling costs

## OPTIONS

- Emergency power pack available for the 4' 40w and the 2' 20w fixtures\*
- Chain sets
- 0-10vDC Dimming
- Photocell
- Occupancy sensor
- Mounting bracket

2', 4', 5' & 6' Economy grade fixture great for both indoor and outdoor applications. New removable end makes wiring quick and easy; pass-thru wiring not required as both ends are electrified.

| TECHNICAL SPECIFICATIONS         |  | OPTICAL & PERFORMANCE SPECIFICATIONS |  |
|----------------------------------|--|--------------------------------------|--|
| Housing                          | Structurally rigid glass reinforced polyester housing & poured in place gasket | Lumen Output                         | 2' - 24w: 2640L ±5%   4' - 48w: 5280L ±5%<br>5' - 60w: 6600L ±5%   6' - 88w: 9680L ±5% |
| Finish                           | Grey   | IP Rating                            | IP65   |
| Mounting                         | Ceiling, Wall mount or Suspension Chain  | NEMA Rating                          | 4x   |
| Applications                     | Canopies, cold storage, garage/workshop, parking garages, food processing      | CRI                                  | >70  |
| <b>ELECTRICAL SPECIFICATIONS</b> |  | Beam Angles                          | 120°   |
| LED Engine                       | CREE   | L70                                  | 60,000 + hours   |
| Input Voltage                    | 100-240v   | LM79                                 | 105 L/W, 95 L/W on frosted lens  |
| Ambient temperature              | -40° to 40°C   | Downflux efficiency                  | 98.7 clear lens  |
| Available Voltages               | 100-240v standard, 347-480v  | Certifications                       | Approved to CSA and UL standards (UL, or equivalent, marked only when specified)       |



info@ecopowerinc.com | ecoled.ecopowerinc.com | 1.800.564.8086




©2019 Ecopower Inc. All rights reserved.  
REV-0724.19-144325

Warranty is only valid based on fixtures operating for 12 hours or less per day.

# VTSL VAPOUR TIGHT SLIM LINE


**ecOLED™**  
A DIVISION OF ecPOWER

## DIMENSIONS

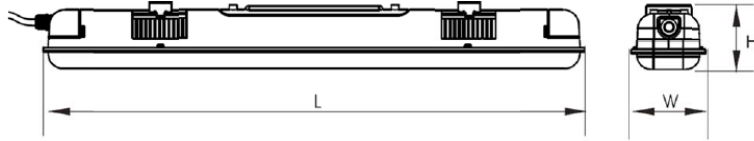

| Model | Length | Width  | Height |
|-------|--------|--------|--------|
| 24w   | 23.6"  | 4.33"  | 3.39"  |
| 48w   | 47.2"  | 11.41" |        |
| 60w   | 60.24" | 4.33"  |        |
| 88w   | 73.42" | 11.41" |        |

## PHOTOMETRICS

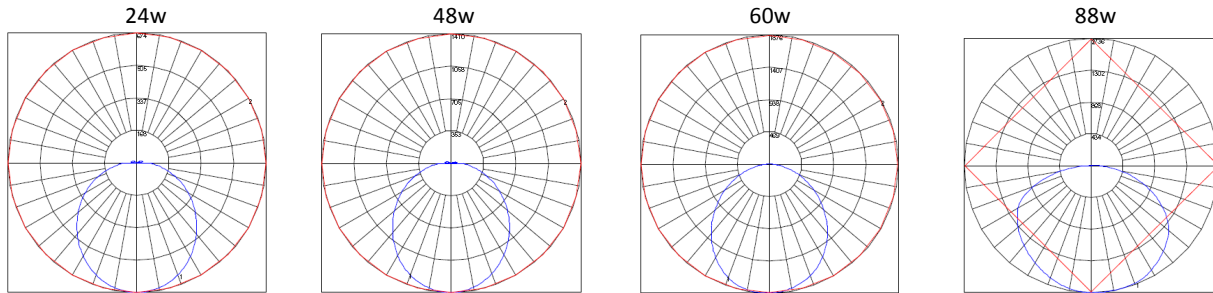

## PRODUCTS AVAILABLE

- VTSL224WNWV4
- VTSL4-88WCWV4-L1
- VTSL448WNWV4
- VTSL560WNWV4

info@ecpowerinc.com | ecoled.ecpowerinc.com | 1.800.564.8086



©2019 Ecopower Inc. All rights reserved.  
REV-0829.19-131025