

WPD LED DECORATIVE WALL PACK

ecoLED[™]
A DIVISION OF **ecopower**



FEATURES

- Decorative alternative to the standard wall pack
- Easy install
- Small footprint
- No mercury; No recycling costs

OPTIONS

- Custom colours available, please contact Ecopower as MOQ's apply.
- Arc or Square shape
- Voltage options
- Kelvin options

Features a durable, vandal-resistant, injection molded polycarbonate enclosure with an architectural bronze finish. Enclosure is fully sealed and gasketed, and is IP65 Rated. Enclosure and hardware are corrosion resistant. This wall pack provides ideal light distribution, and the LEDs are protected by a high-impact, UV stabilized polycarbonate prismatic refractor with photocell.

TECHNICAL SPECIFICATIONS

Housing	Aluminum with a polycarbonate enclosure
Finish	Bronze
Mounting	Flush
Applications	Ideal for wet locations, entrance ways, columns, security lighting and walkways

ELECTRICAL SPECIFICATIONS

Lighting Source	CREE
Power Factor	>0.95
Ambient temperature	-40° to 40°C / -40° to 104°F

OPTICAL & PERFORMANCE SPECIFICATIONS

Lumen Output	20w: 1,400L ±5% 30w: 2,000L ±5%
IP Rating	IP54
CRI	>70
Beam Angles	180°
NEMA	4x
L70	50,000 hours
LM80	L70 = 50,000 hours +
LM79	85L/W ± 5%
Certifications	Approved to CSA and UL standards (UL, or equivalent, marked only when specified), CE & RoHS



info@ecopowerinc.com | ecoled.ecopowerinc.com | 1.800.564.8086



A Canadian
Manufacturer

Warranty is only valid based on fixtures operating for 12 hours or less per day.


©2019 Ecopower Inc. All rights reserved.
REV-1016.19-143427

WPD LED DECORATIVE WALL PACK


ecOLED™
A DIVISION OF ecPOWER

DIMENSIONS

Arc

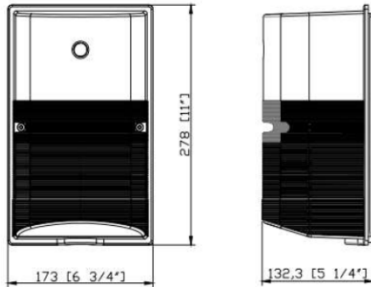

Square

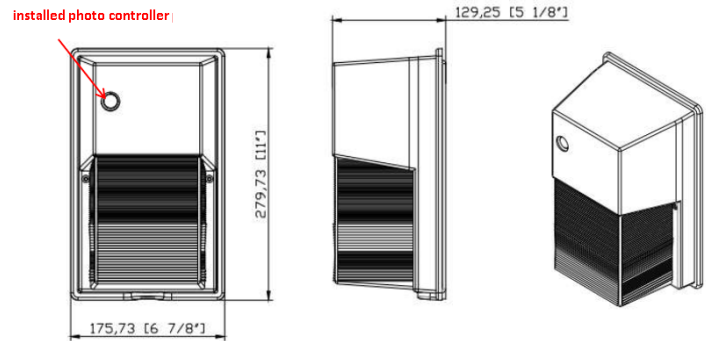

AVAILABLE MODELS

WPD20WCWV4B00ARC
WPD20WNWV3B00SQU
WPD30WCWV3BOOSQU
WPD30WCWV4-ARC
WPD30WWWV3-SQU

NOTE

V3 = 120vAC Only
V4 = 100-277vAC
B00 = Photocell

info@ecopowerinc.com | ecoled.ecopowerinc.com | 1.800.564.8086



A Canadian
Manufacturer

©2019 Ecopower Inc. All rights reserved.
REV-1016.19-143427