

EP-PLH LED BRIGHT STICK COMMERCIAL BULB


ecOLED™
A DIVISION OF ecOPower



6, 8 and 11 watt LED bright stick series replaces up to 60watt incandescent, 27 watt and HID bollards. High quality, even lighting, 50,000 hours of life (L70). A reliable low maintenance solution for existing fluorescent and low wattage HID style fixtures. Available in med base, G24, G23 and other options.

FEATURES

- 360° light dispersion & 270° rotatable socket options
- Instant-start, no flickering, no humming
- 6w replaces 13w CFL
- 8w replaces 18w CFL
- 11w replaces 26w CFL
- Non-compatible with electronic ballasts
- 6w can replace 13w CFL, 8w can replace 18w CFL, 11w can replace 26w CFL

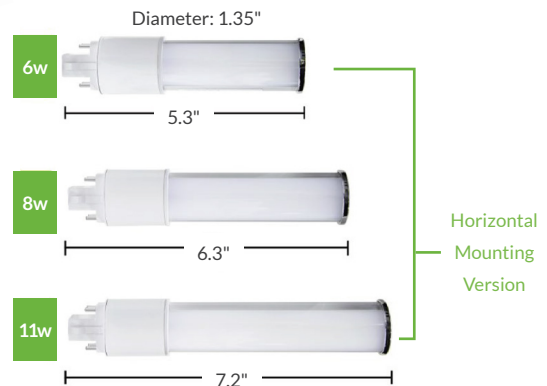

TECHNICAL SPECIFICATIONS

Housing	6060 Aluminum and hardened plastic
Finish	As shown
Ingress Protection	IP40
Mounting	G24D / G24Q / GX24Q / GX23 / G23 / GU24 / E26
Applications	Pots, hanging fixtures
Dimensions	9watt: 127mm x 35mm x 35mm 11watt: 139mm x 35mm x 35mm

ELECTRICAL SPECIFICATIONS

Lighting Source	2835 SMD LED's
Available Wattages	6w / 8w / 11w
Power Factor	>0.9
Ambient temperature	-25° to 40°C
Available Voltages	100-277v

OPTICAL & PERFORMANCE SPECIFICATIONS

Lumen Output	6w: 560-620L 8w: 790-850L 11w: 1180-1270L
CRI	>80
Lens	Phosphor/Clear
Beam Angles	120° 180° 360° options
L70	>50,000 hours
LM80	45°C 9000 hours 99%
LM79	Up to 100 lumens per watt
Certifications	Approved to CSA and UL standard E365384, CE & ROHS



info@ecopowerinc.com | ecoled.ecopowerinc.com | 1.800.564.8086



A Canadian
Manufacturer

Warranty is only valid based on fixtures operating for 12 hours or less per day.

©2019 Ecopower Inc. All rights reserved.
REV-0724.19-144923

EP-PLH LED BRIGHT STICK COMMERCIAL BULB



DIMENSIONS CHART

W	L	D
6w	5.3"	1.35"
8w	6.3"	1.35"
11w	7.2"	1.35"

DIMENSIONS & BASES CHART

BEAM	WATTAGE	BASES	LENGTH W/ DIFFERENT BASES	
HORIZONTAL	6W	G23/GX23	147mm	
		G24/G24Q/G24D	141mm	
		GU24	135mm	
	8W	E26	149mm	
		G23/GX23	166mm	
		G24/G24Q/G24D	160mm	
	11W	GU24	154mm	
		E26	168mm	
		G23/GX23	190mm	
			G24/G24Q/G24D	184mm
			GU24	178mm
			E26	192mm

AVAILABLE MODELS

EP-PLH-8W-WW-V4-GX24Q-L2
 EP-PLH-8W-NW-V4-GX24Q-L2
 EP-PLH-8W-CW-V4-GU24
 EP-PLH-11W-NW-V4-G24Q
 EP-PLH-11W-CW-V4-GX24Q
 EP-PLH-11W-CW-V4-G24Q
 EP-PLH-11W-CW-V4-E26

BASE SELECTION GUIDE

